





LAPURE®

Minimalist terrace covering with waterproof, windproof and sun protection screen roof, with an open, panoramic view.

DAY



EVENING



Modern



There are two versions. The first has end columns, and the second has a roof overhang that juts out past the columns so as to provide the optimum amount of shade across the entire terrace.

Classic - "Classic Line"



There is no visually disruptive lateral connection when open, which creates a beautiful "infinity view".

LAPURE®

Minimalist terrace covering with waterproof sun protection screen roof


The stylish, **minimalist** Lapure consists of a windproof, waterproof, sun protection screen roof that rests on elegant, discrete aluminium columns **with no disruptive lateral connection**. It is anchored to an existing façade.

When the roof is closed, the Lapure provides protection from the sun, wind and rain. When the roof is open, you can enjoy the sun as the **delicate structure** is not visually disruptive.

There are two types of columns for the Lapure: **“end columns”** with water drainage [via side guides and columns, even when half open]. You can also opt for **“shifted columns”** [with roof overhang and water drainage via gutters, even when half open]. The latter has a roof overhang that juts out past the columns so as to provide the optimum amount of shade. This lets you enjoy enough shade, even when the sun is low in the sky, for instance [installation on west-facing façades].


A **“coupled”** version of both types is also available so that two or more roofs can be installed perfectly next to one another so that they span across larger areas [just 1 column to be joined].

Thanks to the wide range of colours for the structure and the screen fabric, the Lapure blends in to every environment and suits every architectural style.

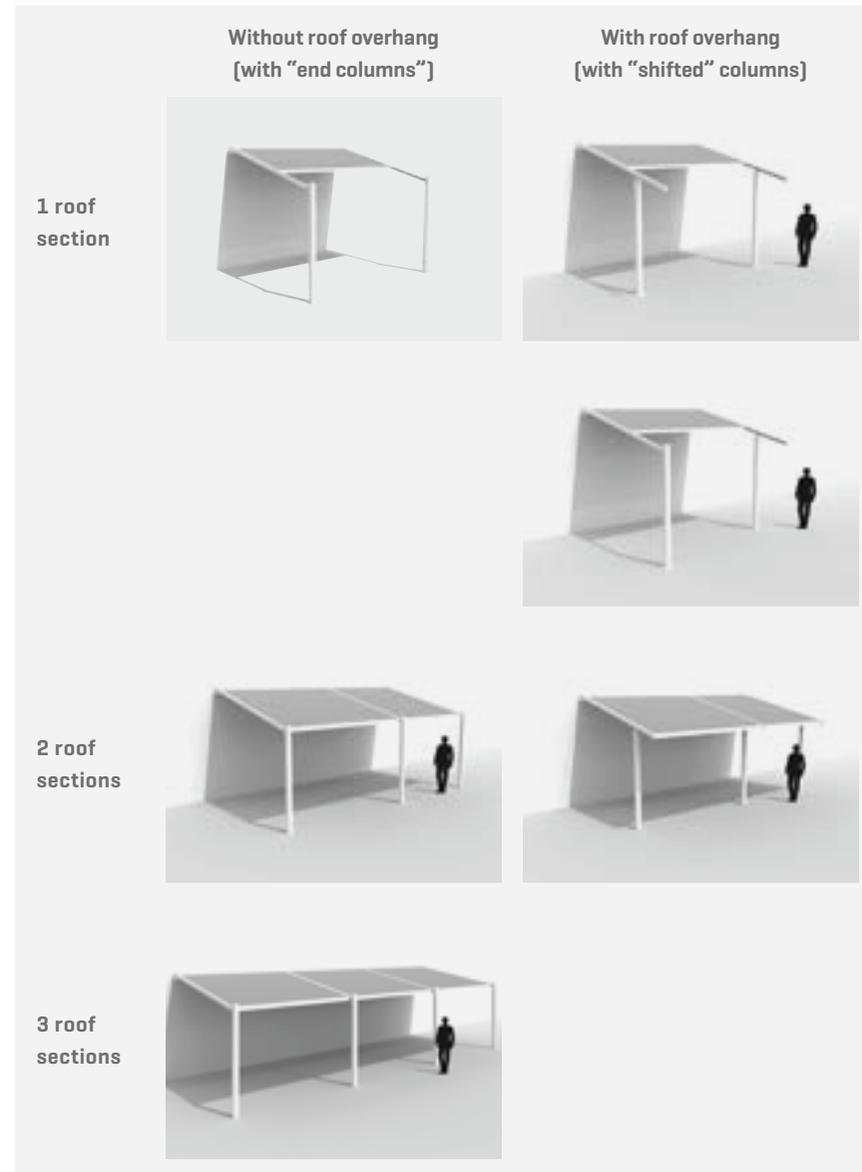


Dimensions and features


Roof options	Retractable waterproof, translucent sun protection screen
Dimensions	
Max. width/Pivot	6000*
Max. depth/Span	5000
Max. passage height	2900
Joinable	joinable up to max. width of 18 m
Min. angle	10°
Technical specifications	
Integrated water drainage	standard (depending on the type)
Integrated cables	standard
Integrated motor	standard
Operating switch	not applicable
RTS operation	standard
io-homecontrol® operation	option at no extra cost
Customisation	
Triangle	option
Glass roof blades - Lineo® Luce	not applicable
Wooddesign roof blades	not applicable
Integrated vertical windproof screens	not applicable
Sliding door Loggiascreen® Canvas	option
Sliding glass walls	not applicable
Combination of sliding glass walls + integrated windproof screens	not applicable
Sliding wall in Loggiawood® / Loggialu® Wooddesign/ Loggiascreen® Canvas / Loggialu® / Loggialu® Stirata / Loggialu® Plano / Loggialu® Linea / Loggialu® Privacy / Loggiawood® Privacy	not applicable
Windproof screens (surface-mounted) with Fixscreen® 100 EVO Slim F / Fixscreen® 150 EVO F	option
Integrated LED lighting	option
Beam with Heat & Sound	option
Linus wall 1 or 2-sided	not applicable



patented technology

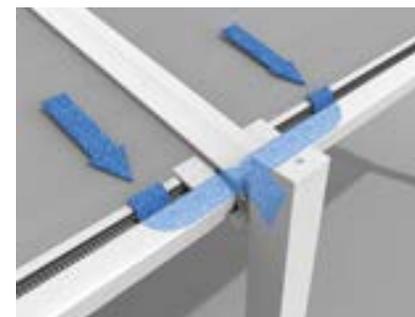

Coupled version with end column

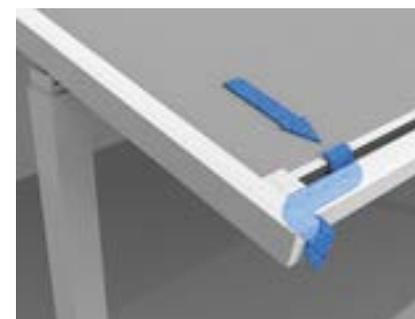

With shifted columns

* 1 roof section between 4 and 6 m: a connector bar [with or without LED] must be used

